



NO OVEN, NO AUTOCLAVE COMPOSITES

350 F Composite Tooling

Bond tools

Caul sheets

Thick Billet

Quick delivery (typical 3-8 weeks)
Ideal for low-cycle prototype fabrication

Areas from 0.1 ft² to 1000 ft²

Thicknesses from 0.020" to 4"

Tolerances down to +/- 0.005"


Aerospace-grade carbon or glass fiber

NONA Composites RT-177 resin

350 °F continuous capability performance

Autoclave pressure capable

Machinable/repairable with standard processes

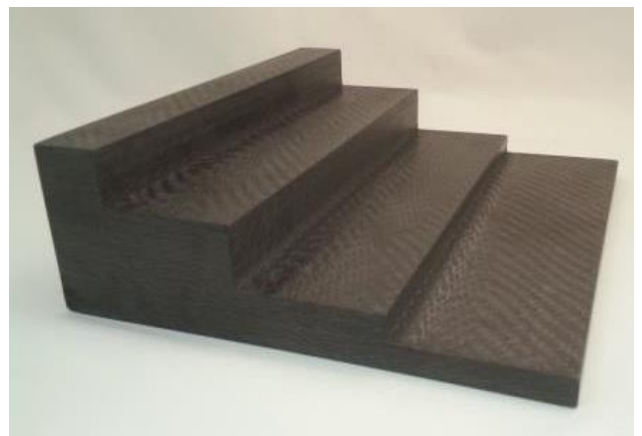

For More Information Contact:

937-490-4814 | info@nonacomposites.com